




Food and Beverage concise

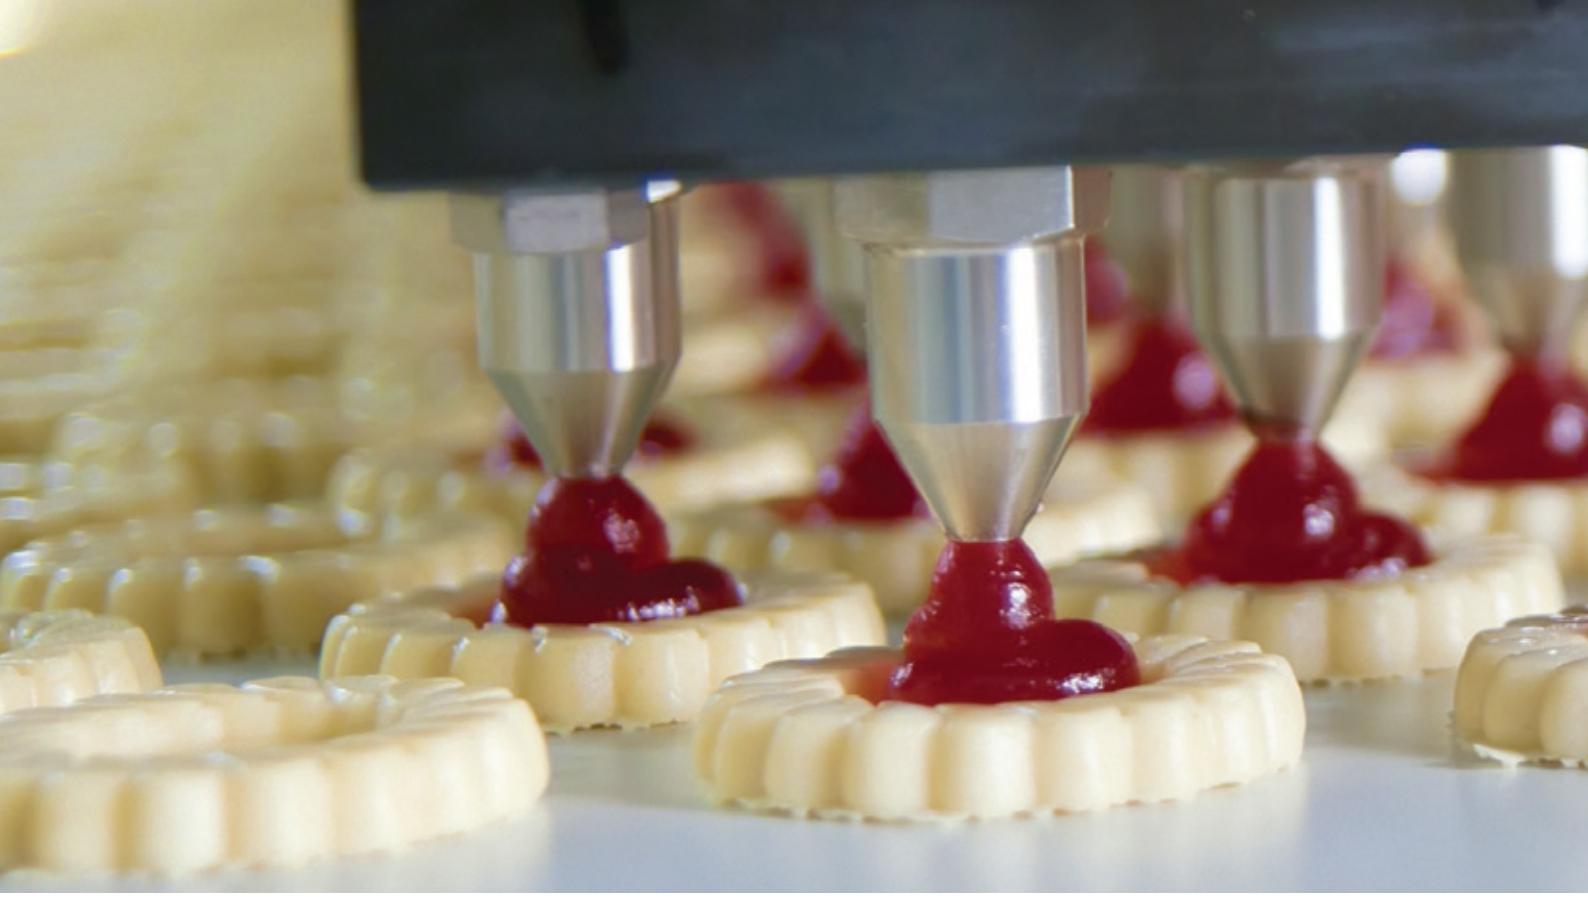

Prodotti per industria alimentare e per acqua potabile

Products for food industry and for drinking water



Cilindri in acciaio inossidabile
a norma ISO 6432,
diametri da 16 a 25 mm

*ISO 6432 stainless steel cylinders,
diameters from 16 to 25 mm*



Cilindri serie HCR, High Corrosion
Resistance, a norma ISO 15552,
diametri da 32 a 125 mm

*ISO 15552 cylinders Series HCR,
High Corrosion Resistance,
diameters from 32 to 125 mm*



Cilindri in acciaio inossidabile
a norma ISO 15552,
diametri da 32 a 125 mm

*ISO 15552 stainless steel cylinders,
diameters from 32 to 125 mm*



Filtri e regolatori per acqua,
BIT serie F,
attacchi da 1/8" e 1/4"

*Filters and regulators for water,
BIT Series F,
1/8" and 1/4" connections*



Cilindri in acciaio inossidabile tondi,
diametri da 32 a 63 mm

*Round stainless steel cylinders,
diameters from 32 to 63 mm*



Isole di elettrovalvole per Splash
area, serie HDM, EB 80,
da 4 a 12 elettrovalvole

*Solenoid valve islands for Splash
area, Series HDM, EB 80,
from 4 to 12 solenoid valves*



Raccordi automatici in ottone senza piombo serie F-E e F-NSF, tubi da Ø 4 a 10 mm, filetti da M5 a 1/2"

Automatic fittings in unleaded brass Series F-E and F-NSF, tubes from Ø 4 to 10 mm, threads from M5 to 1/2"



Raccordi a calzamento in acciaio inossidabile AISI 316L, tubi da Ø 6 a 10 mm, filetti da 1/8" a 1/2"

Push on fittings in AISI 316L stainless steel, tubes from Ø 6 to 10 mm, threads from 1/8" to 1/2"



Raccordi automatici in ottone senza piombo serie F-E PLUS e F-NSF PLUS, tubi da Ø 4 a 10 mm, filetti da M5 a 1/2"

Automatic fittings in unleaded brass Series F-E PLUS and F-NSF PLUS, tubes from Ø 4 to 10 mm, threads from M5 to 1/2"



Regolatori di flusso in acciaio inossidabile AISI 316L, filetti da 1/8" a 1/2"

Flow regulators in AISI 316L stainless steel, threads from 1/8" to 1/2"



Raccordi automatici in acciaio inossidabile AISI 316L, tubi da Ø 4 a 12 mm, filetti da M5 a 1/2"

Automatic fittings in AISI 316L stainless steel, tubes from Ø 4 to 12 mm, threads from M5 to 1/2"



Cilindri speciali in acciaio inossidabile

Special cylinders in stainless steel



Raccordi standard in acciaio inossidabile AISI 316L, filetti da 1/8" a 1/2"

Standard fittings in AISI 316L stainless steel, threads from 1/8" to 1/2"



CERTIFICAZIONI / CERTIFICATIONS:

- CE 98/83	- NSF
- CE 1935/2004	- WRAS
- CE 10/2011	- ROHS
- DVGW	

